


Image simulations of extended objects using an algorithm based on the Extended Nijboer-Zernike (ENZ) formalism

S. van Haver¹, O.T.A. Janssen¹, A.J.E.M. Janssen², J.J.M. Braat¹, S.F. Pereira¹
1. Delft University of Technology, IST - Optics Research Group, 2. Philips Research Europe
Contact: s.vanhaver@tudelft.nl

Introduction:

We present details of a recently developed imaging algorithm based on the Extended Nijboer-Zernike (ENZ) formalism [1][2]. We focus mainly on the imaging part of the algorithm which generates the through-focus images using the Zernike functions that describe the entrance pupil distribution. We show an example illustrating some of the advantages introduced by the ENZ approach.

ENZ imaging scheme:

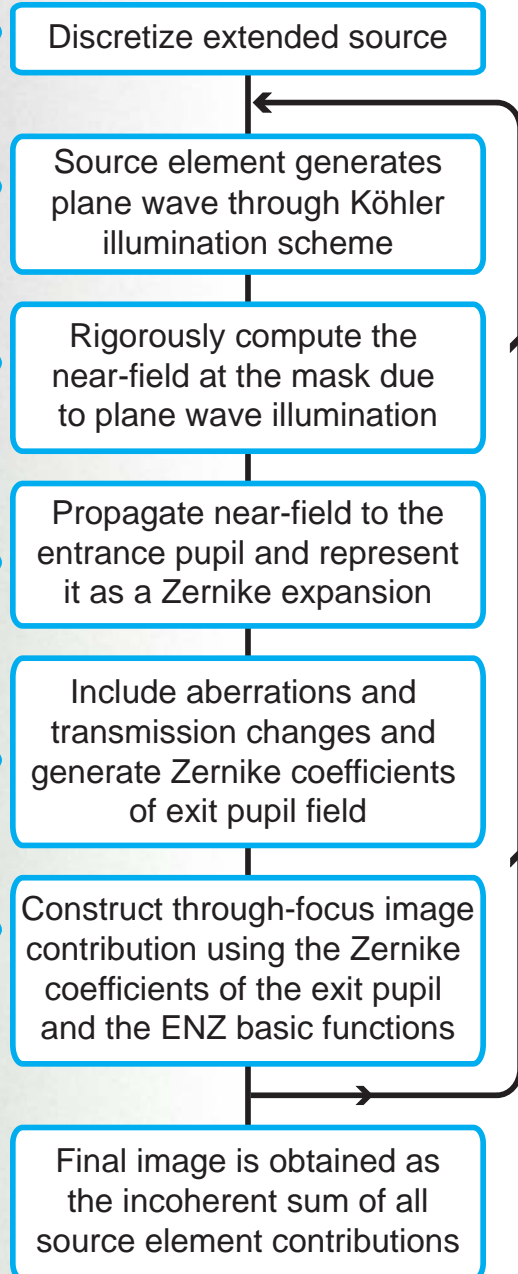

Convergence & accuracy:

- Convergence considerations on the FDTD tool performing both the near-field and the propagation computations can be found in Refs. [3],[4].
- The convergence of the Zernike expansion in the entrance pupil strongly depends on the object. Large objects with a high degree of periodicity require a large number of Zernike coefficients. Convergence for a double hammerhead structure is shown in Fig. 2A.
- The ENZ basic functions are computed using a well-converging series expansion. These functions are independent of the object and can thus be calculated and stored in advance.
- As the ENZ basic functions can be computed in advance, the operational accuracy of the method is solely limited by the accuracy of the Zernike expansion in the entrance pupil. This is illustrated by the double hammerhead example presented below.

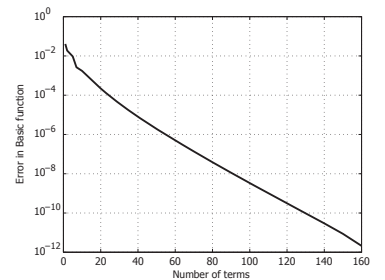


Fig 1. Convergence of the ENZ basic functions.

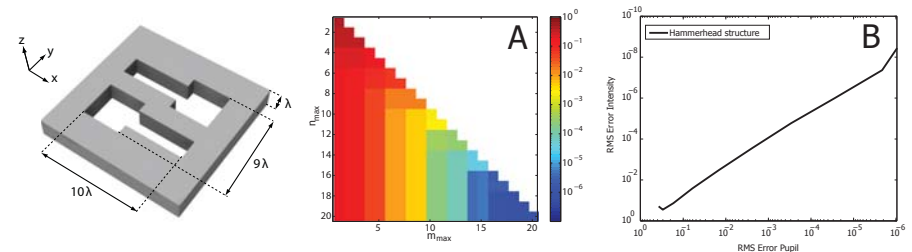


Fig 2. For a double hammerhead structure we show: A) The expansion accuracy (RMS error) in the pupil versus the maximum number of radial and azimuthal Zernike orders (n_{max}, m_{max}) included in the fit. B) The resulting accuracy in the through-focus image.

Conclusions:

Advantages of ENZ-imaging:

- fully rigorous approach
- complete through-focus image behaviour obtained in a single simulation (see Fig. 3)
- speed enhancements possible through precalculation and storage of ENZ basic functions

References:

- [1] S. van Haver, et al., SPIE 6924, 69240U (2008) [3] O.T.A. Janssen, et al., SPIE 6924, 692410 (2008)
[2] ENZ website: <http://www.nijboerzernike.nl> [4] P. Lalanne, et al., J. Eur. Opt. Soc. Rap. Publ. 2, 07022 (2007)


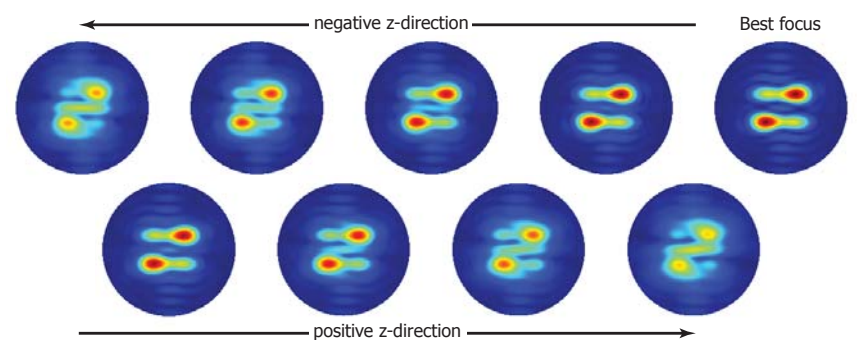


Fig 3. We show the simulated through-focus image behaviour (imaging by an immersion lithographic system, NA = 1.224, $\lambda = 193\text{nm}$, immersion fluid water, x-pol. normal incidence plane wave illumination) of the hammerhead structure defined in Fig 2. Note that all images are obtained in a single computational run using ENZ basic functions stored in a look-up table.

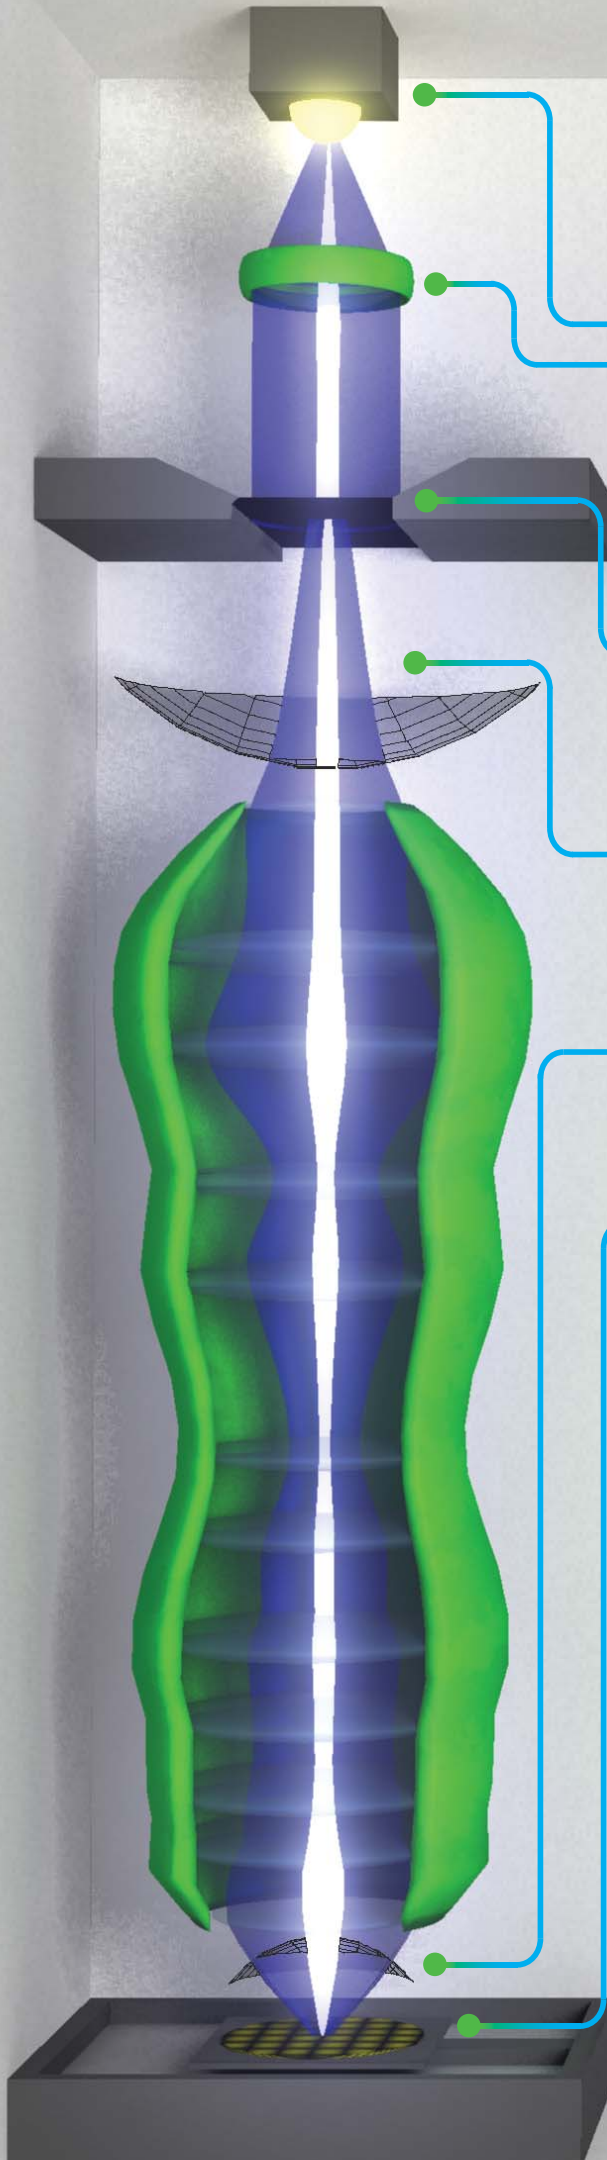

*Artists impression by Olaf Janssen